

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number
WO 2004/098189 A1

(51) International Patent Classification⁷:

H04N 7/173

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/KR2004/001014

(22) International Filing Date: 30 April 2004 (30.04.2004)

(25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data:

10-2003-0027937

1 May 2003 (01.05.2003)

KR

(71) Applicant (for all designated States except US): ALTI-CAST CORP. [KR/KR]; 16th Floor, Nara Investment Banking Corp. Bldg., 1328-3, Seocho-dong, Seocho-gu, Seoul 137-070 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LEE, Zino [KR/KR]; #203-603, Hyundai Home Town 2nd, Dongcheonmaeul, 862, Dongcheon-dong, Yongin-si, Kyunggi-do 449-120 (KR).

(74) Agent: KIM, Jin-Hak; 1106, Kumsan Bldg., 17-1, Youido-dong, Youngdeungpo-ku, Seoul 150-727 (KR).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR BROWSING INFORMATION WITH SET TOP BOX HAVING TV PLAZA FUNCTION

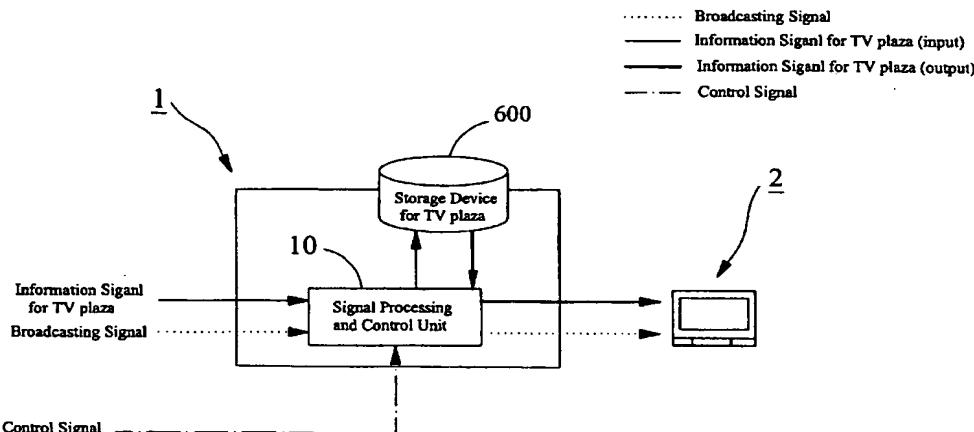

(57) Abstract: The present invention relates to a method for browsing an information with a set top box having TV plaza function, comprising the steps of: i) storing a TV plaza information signal, independently of a user's request, to a storage device of the set top box in order to construct a TV plaza within the set top box; ii) in response to user's selection of an item to be interested in, bookmarking a metadata of the selected item in a memory of the set top box; iii) extracting data directed to the bookmarked metadata of the selected item from the TV plaza information stored in the storage device; and iv) delivering the extracted data to user's TV in order to display them on the user's TV.

WO 2004/098189 A1

**METHOD FOR BROWSING INFORMATION
WITH SET TOP BOX HAVING TV PLAZA FUNCTION**

TECHNICAL FILED OF THE INVENTION

5 The present invention relates to method for browsing information with a set top box having TV plaza function.

BACKGROUND OF THE INVENTION

Interactive televisions have been tested and developed by 10 various satellite broadcasting providers, telephone providers and/or cable television providers. The interactive televisions enable users to actively interact with the televisions beyond simple channel manipulation, simple tone control, simple videotape recoding, etc. For example, the users of the 15 interactive televisions can make an access to videos on demand, payments of bills, banking and shopping, and participate in forums. The interactive televisions are expected to substantially accelerate the information society including the people who are not intimate to a computer such as housewives and 20 the aged. But, there remain some unsolved problems of low transmission rate, low distribution of bi-directional transmission network.

FIG. 1 schematically illustrates the basic structure of one 25 of the conventional set top boxes. As shown in FIG. 1, the

conventional set top box comprises a signal input interface 100 which receives a broadcast signal from broadcasting providers, a demultiplexer (DEMUX) 200 which classifies the received broadcast signal, a signal output interface 300 which decodes 5 the received broadcast signal and transmits the decoded broadcast signal to a user's display device, and a microprocessor 400 which generates a command in response to user's control signal.

10 FIG. 2 schematically illustrates an exemplary embodiment of the processing of a broadcast signal by the conventional set top box shown in FIG. 1, wherein a signal input interface 100 comprises a tuner 101 which receives an encoded broadcast signal and a channel decoder 102 which extracts a user-requested 15 channel from the received broadcast signal under control of a microprocessor 400. The broadcast signal encoded under a suitable compression standard can be one of a video signal, an audio signal, a data signal for data broadcast or a composite signal thereof. The broadcast signal is classified by the action 20 of a DEMUX 200 and then is transmitted to a signal output interface 300.

25 Relied upon the forms of the broadcast signal, the signal output interface 300 comprises at least one decoder selected from the group consisting of a data decoder 301 which decodes

the data signal, a video decoder **302** which decodes the video signal, and an audio decoder **303** which decodes the audio signal. For example, the DEMUX **200** extracts an audio signal from the user-requested channel and then transmits it to the audio decoder **303** which decodes the delivered audio signal and transmits the decoded signal to a user's speaker in an analog form.

Likewise, a video signal is decoded by the video decoder **302** of the signal output interface **300** and is then transmitted to a user's TV. If the user's TV is analog type, the decoded video signal is transmitted to the user's TV in an encoded form by one of various standard video formats, for example, NTSC(National Television Standard Committee), RGB(Red-Green-Blue) and PAL(Phase Alternation by Line). In case that the broadcast signal is a composite signal, for example, of the data signal and the video signal, the data and video signals are separated each other from the composite signal by the action of the DEMUX **200** and is transmitted to the data decoder **301** and the video decoder **302**, respectively. If matching of the decoded data and video signals is required, the matching is performed through graphic over lay technology. The matched signal is then transmitted to the user's TV.

25 In order to satisfy various demands of the users, the set

top box may additionally comprise an operating system, operating program, a memory (ROM, RAM) storing the data in use, and a storage device (for example, a hard drive) into which the programs to be recorded are stored.

5

However, the method for searching items to be interested in is not well established. Even though bi-directional communications are popularly used, the time for accessing to external servers through return path servers would be very 10 longer. Frequent access to the external servers might be an excessive burden to the return path servers.

SUMMARY OF THE INVENTION

The object of the present invention is to provide a method 15 for browsing items to be searched in a simple and rapid manner, without any access to an external server.

Another object of the present invention is to provide a method for browsing information with a set top box having TV plaza function, comprising the steps of: i) storing a TV plaza 20 information signal, independently of a user's request, to a storage device of the set top box in order to construct a TV plaza within the set top box; ii) in response to user's selection of an item to be interested in, bookmarking a metadata of the selected item in a memory of the set top box; iii) 25 extracting data directed to the bookmarked metadata of the

selected item from the TV plaza information stored in the storage device; and iv) delivering the extracted data to user's TV in order to display them on the user's TV.

5 The other object of the present invention is to provide a method for provide a method for browsing information with a set top box having TV plaza function, wherein the TV plaza information comprises a first identification data region from which the transmitted information is identified as an TV plaza 10 information, a second identification data region from which a TV plaza subscriber to whom the TV plaza information belongs is identified, a data region into which a TV plaza information to be informed from a TV plaza subscriber to a user is stored, and a metadata region into which a metadata is included, and the 15 step iii) is carried out by comparing the bookmarked metadata of the selected item with the metadata of the TV plaza information.

BRIEF DESCRIPTION OF THE DRAWINGS

20 FIG. 1 is a schematic block diagram illustrating the basic structure of the conventional set top box, and the flow of a broadcast signal.

FIG. 2 is a schematic block diagram illustrating a specific exemplary embodiment of the conventional set top box shown in 25 FIG. 1, and the flow of a broadcast signal.

FIG. 3 is a schematic block diagram illustrating the method of the present invention.

FIG. 4 is a constitutional diagram showing a preferred embodiment of a TV plaza information signal which is adequate 5 for the method of the present invention.

FIG. 5 is a block diagram exemplarily illustrating the method of the present invention.

FIG. 6 is a diagram showing a preferred embodiment of a user interface displayed on user's TV.

10

DETAILED DESCRIPTION OF THE INVENTION

As used herein, the phrase "TV plaza" (television plaza) refers to a plaza formed within a set top box, wherein the plaza is formed by storing information data supplied from various 15 information providers other than a TV user (or viewer) into a storage device of the set top box independently of the TV user (or viewer), and the user searches and displays the information data previously stored within the set top box onto the user's TV. That is, TV plaza refers to a plaza of the information data 20 stored independently of the user's request into a storage device of the set top box and the user can browse or navigate the user-independently stored information and displays the user-requested information.

25 The phrase "TV plaza information", as used herein, refers

to information supplied for the construction of TV plaza. The storage and the correction of the TV plaza information are independent of a user's request or demand, while the navigation and the display of the information are dependent upon the user's 5 request. Such TV plaza information may be life information including advertisement information (for example goods information and company information), education information, stock information and weather information. Further, the phrase "a TV plaza information signal" refers to a signal produced from 10 suitable digital encoding of TV plaza information such that a set top box can receive the signal. The TV plaza information signal is characterized in that the information signal is independent of the ordinary broadcast signal and is stored independently of the user's request into a storage device such 15 as hard disk assigned to store the information signal, thereby constructing TV plaza within the set top box of the user.

The phrase "a broadcast signal", as used herein, refers to a signal in which a user can determine both the storage of the 20 broadcast signal and the display thereof. Such a broadcast signal includes, but is not limited to, ordinary signals supplied by television broadcasting provider such as KBS, MBC, SBS, CNN and NHK, satellite broadcasting providers and CATV broadcasting providers.

While providers for the TV plaza information signal can be different from those for the broadcast signal, preferably the TV plaza information signal and the broadcast signal are provided by the same providers. But, it should be understood that TV 5 plaza information signal and the broadcast signal are provided in a separated form. The phrase "a separated form" means that the TV plaza information signal has different identification information from that of the broadcast signal.

10 The phrase "a TV plaza operator", as used herein, refers to a person who operates and manages TV plaza as a whole. Further, "a TV plaza subscriber" refers to a person who provides TV plaza information under the agreement with the TV plaza operator. As a TV plaza subscriber, the persons who intend to advertise goods, 15 to inform companies and/or services can be mentioned.

In the following, the present invention will be more fully illustrated referring to the attached drawings.

FIG. 3 is a schematic block diagram illustrating the method 20 of the present invention. A TV plaza information signal transmitted together with a broadcast signal is processed by a signal processing and control unit 10 of a set top box 1, and is stored, independently of a user's request, in a storage device 600 of the set top box 1 in order to construct a TV plaza. The 25 broadcast signal is also processed by the signal processing and

control unit **10** and a user-requested channel signal is displayed on user's TV **2**. When an item about which a user want to have more detailed information is found in the displayed program, a user selects the item by manipulation of a control device (for 5 example, a remote controller or a wireless keyboard). A metadata corresponding to the selected item is bookmarked in a memory (not shown) of the signal processing and control unit **10**. In response to the user's request, the signal processing and control unit **10** browses and extracts data directed to the 10 metadata of the item to be interested in from a TV plaza constructed in the storage device **600**. The extracted TV plaza information is transferred and displayed on the user's TV **2**.

FIG. 4 is a constitutional diagram showing a preferred 15 embodiment of a TV plaza information signal which is adequate for the method of the present invention. The TV plaza information signal **20** comprises a TV plaza information identification data region **21**, a TV plaza subscriber identification data region **22**, a TV plaza information data 20 region **23** and a metadata region **24**. The TV plaza information identification data region **21** includes the information from which the transmitted information is identified as a TV plaza information. The signal processing and control unit **10** examines the TV plaza information identification data region **21** in order 25 to confirm whether the received data is the TV plaza information

or not. If the received data is proven to be a TV plaza information, it delivers the received data to a storage device 600 independently of the user's request. The TV plaza subscriber identification data region 22 includes the information from 5 which a TV plaza subscriber is identified. The signal processing and control unit 10 examines the TV plaza subscriber identification data region 22 in order to confirm to whom the TV plaza information belongs, and then stores the received data in a corresponding storage region of the storage device 600. The TV 10 plaza subscriber identification data region 22 allows subscriber-dependent storage and management of the TV plaza information. The TV plaza information data region 23 includes the information of which the TV plaza subscriber informs the user. In response to the user's request for more detailed 15 information, the TV plaza information data region 23 is displayed on the user's TV 2. The metadata region 24 includes a metadata, which allows efficient management of the TV plaza information. For example, when advertising information is included in the TV plaza information data region 23, the name of 20 the manufacturer, the name of goods and brief description thereto can be included in the metadata region 24.

FIG. 5 is a block diagram exemplarily illustrating the method of the present invention. The signal processing and 25 control unit 10 of a set top box 1 comprises at least a signal

input interface 100, a demultiplexer (DEMUX) 200, a signal output interface 300, a microprocessor 400 and a memory 500. The signal input interface 100 receives the broadcast signal and the TV plaza information signal, and the DEMUX 200 classifies the 5 received signals and separates them into an audio signal, a video signal and a data signal for data broadcasting. The signal output interface 300 coupled to a user's TV 2, decodes and delivers the signals to the user's TV 2. The microprocessor 400 controls the system, and the memory 500 stores operating systems, 10 applications and data in use. The memory 500 is classified as a ROM(read only memory) which stores the operating systems and the applications and a RAM(random access memory) which stores the operating systems and the applications, and the data in use. As a RAM, a non-volatile flash memory can be used. The storage 15 device 600 of the set top box 1 includes regions assigned to store the TV plaza information.

The TV plaza information signal and the broadcast signal, which are preferably digitally compressed by one of various 20 compression standards (for example, MPEG standard), are firstly transmitted to the signal input interface 100 of the signal processing and control unit 10. Of the received signals, the TV plaza information signal is separated from the broadcast signal by the DEMUX 200 and then, is stored independently of the user's 25 control signal into a storage device 600 to construct a TV plaza

within the set top box 1 of the user. When a user's request for the information is received, the TV plaza information stored in the storage device 600 is transmitted to the signal output interface 300 via the DEMUX 200 under control of the 5 microprocessor 400, and there, the TV plaza information is decoded and displayed on the user's TV 2. In a meanwhile, when the TV plaza information signal and/or the broadcast signal is a composite signal having a mixed form selected from a video signal, an audio signal and a data signal for data broadcast, 10 the composite signal is separated into one another by action of the DEMUX 200 and then is transmitted to the corresponding decoder, and the decoded signal is delivered to the user's TV 2. The broadcast signal of the received signals is processed in a conventional manner. That is, the broadcast signal is 15 transmitted to the signal output interface 300 through the DEMUX 200 under control of the microprocessor 400, and there, decoding of the broadcast signal is performed. The decoded broadcast signal is then transmitted and displayed on the user's TV 2.

20 In viewing the displayed program, the user may find an item about which more detailed information is required. When the item to be searched is selected by the user, the metadata corresponding to the selected item is bookmarked in response to the user's request, under the control of the microprocessor 400 25 in the memory 500, more specifically in the RAM. Thereafter, the

microprocessor 400 browse the TV plaza information stored in the storage device 600 and then extracts the TV plaza information directed to the bookmarked metadata of the item to be interested in. Decision on the relevancy is carried out by comparing the 5 bookmarked metadata of the selected item with the metadata of the TV plaza information. The extracted TV plaza information is transferred and displayed on the user's TV 2 through the DEMUX 200 and the signal output interface 300. Herein, it is preferable to display the metadata of the extracted information 10 at first. The user may display the whole information to be interested in by browsing and selecting the displayed metadata of the extracted TV plaza information.

FIG. 6 shows a preferred embodiment of a user interface 15 displayed on the user's TV. As shown in FIG. 6, the user interface 40 comprises a screen display window 41 which displays the program to be view, and a result display window 42 which displays the search results, wherein the user selects the metadata to be browsed using a control device such as remote 20 controller, and detailed contents of the information is displayed, for example, on the screen display window 41 or on an additional pop-up window.

INDUSTRIAL APPLICABILITY

25 The method for browsing information with the set top box

having TV plaza function according to the present invention enables a simple and rapid access to the information to be interested in. That is, even though the information can be obtained from bi-directional communication, the method utilizes 5 the subscriber-dependent TV plaza information constructed within the set top box. For this reason, the method makes it possible to save the time required for the access to external servers via return path servers and to secure the information in a simple and rapid manner. The method avoids possible excessive burdens 10 loaded to the return path servers resulted from acquisition of the information through bi-directional communication.

CLAIMS


1. A method for browsing information with a set top box having TV plaza function, comprising the steps of: i) storing a TV plaza information signal, independently of a user's request, to a storage device of the set top box in order to construct a TV plaza within the set top box; ii) in response to user's selection of an item to be interested in, bookmarking a metadata of the selected item in a memory of the set top box; iii) extracting data directed to the bookmarked metadata of the selected item from the TV plaza information stored in the storage device; and iv) delivering the extracted data to user's TV in order to display them on the user's TV.
- 15 2. The method as set forth in claim 1, wherein the TV plaza information comprises a first identification data region from which the transmitted information is identified as an TV plaza information, a second identification data region from which a TV plaza subscriber to whom the TV plaza information belongs is identified, a data region into which a TV plaza information to be informed from a TV plaza subscriber to a user is stored, and a metadata region into which a metadata is included, and the step iii) is carried out by comparing the bookmarked metadata of the selected item with the metadata of the TV plaza information.

3. The method as set forth in claim 1, wherein the step iv) is carried out by displaying the metadata of the extracted TV plaza information at first, and then displaying detailed contents of the TV plaza information directed to the user-selected metadata.

1/6

FIG. 1


PRIOR ART

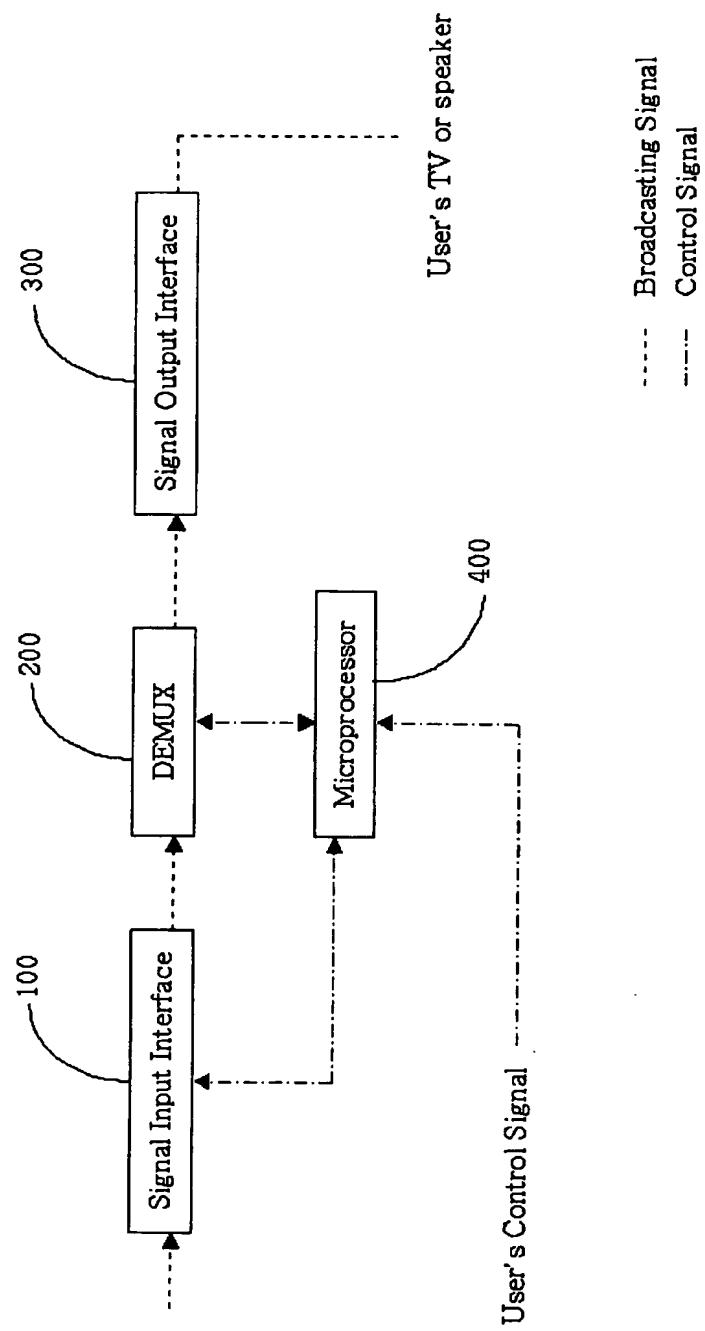

2/6


FIG. 2

PRIOR ART

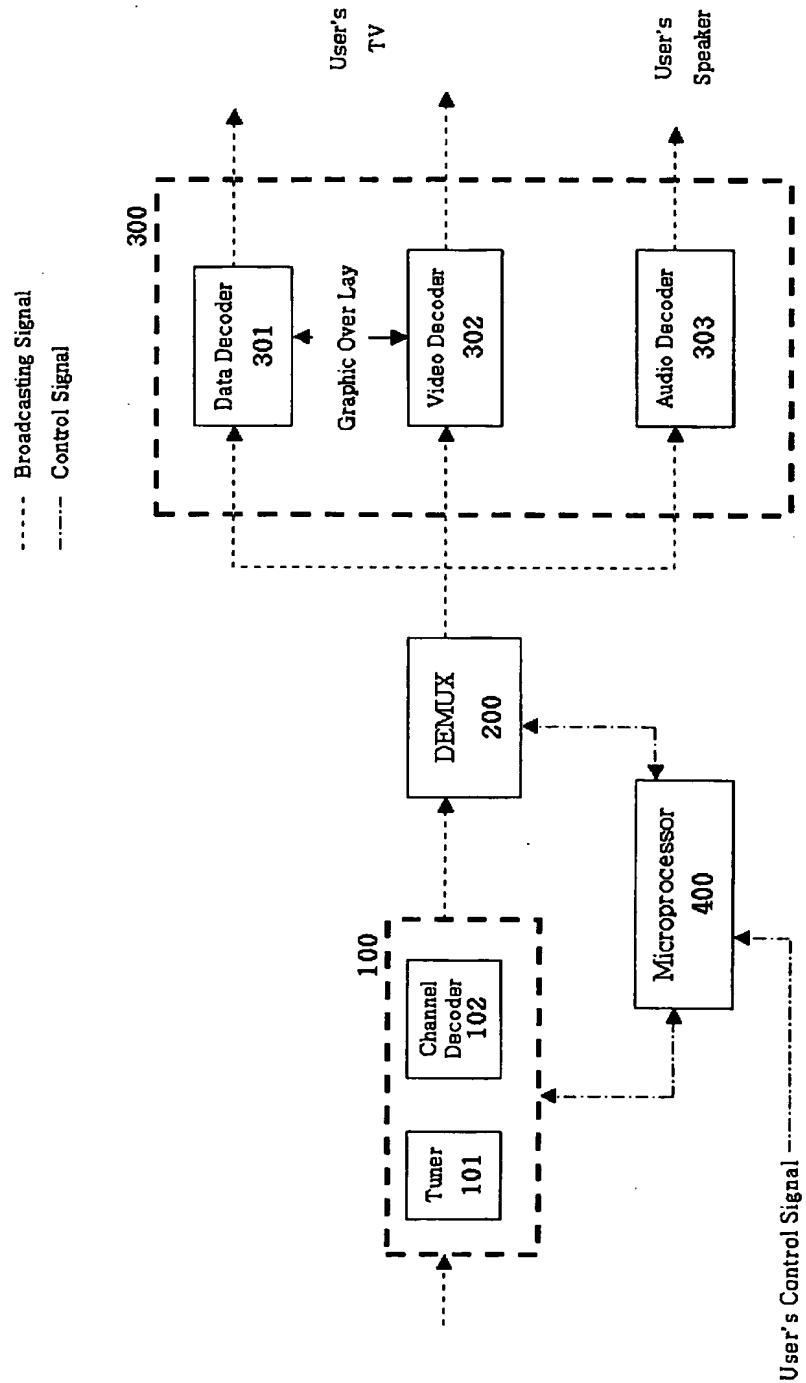

3/6

FIG. 3

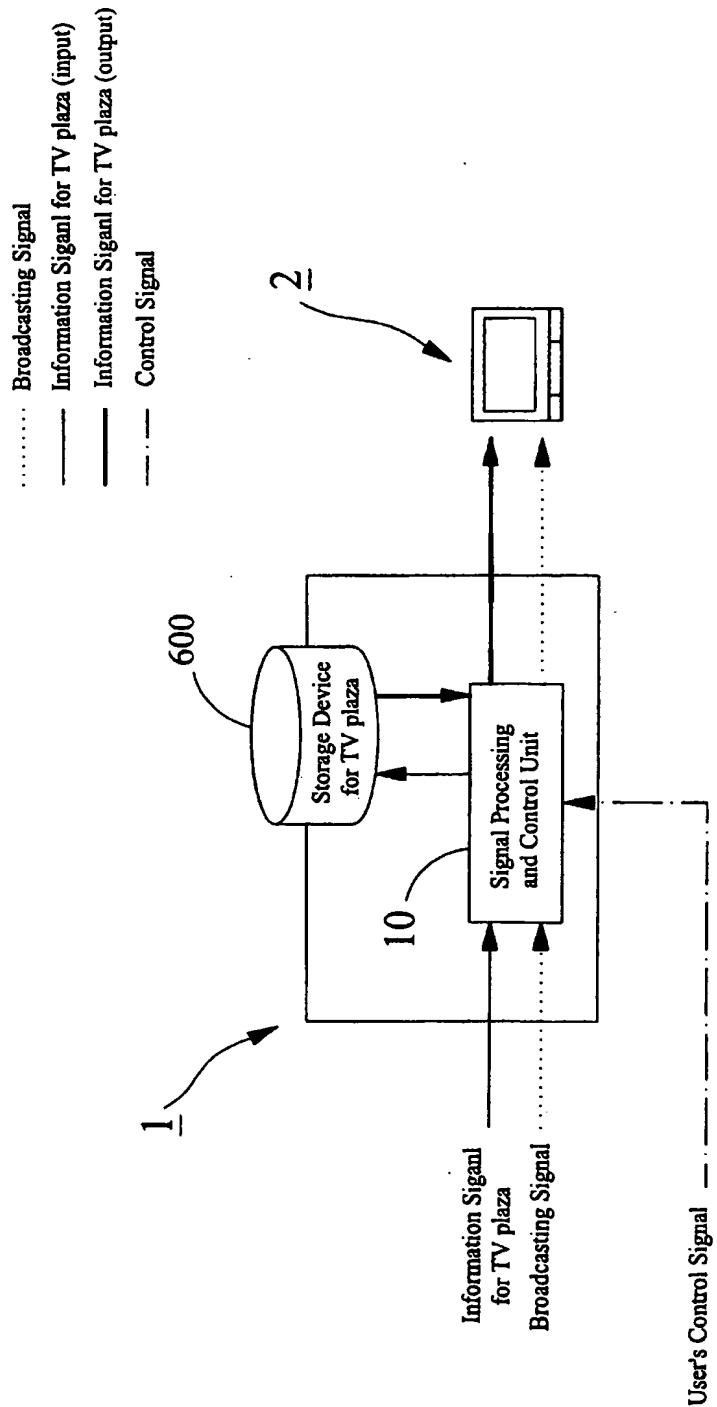

4/6


FIG. 4

20
↓

TV PLAZA IDENTIFICATION INFORMATION <u>21</u>	TV PLAZA SUBSCRIBER IDENTIFICATION INFORMATION <u>22</u>	TV PLAZA INFORMATION <u>23</u>	METADATA <u>24</u>
--	---	--------------------------------------	-----------------------


5/6

FIG. 5

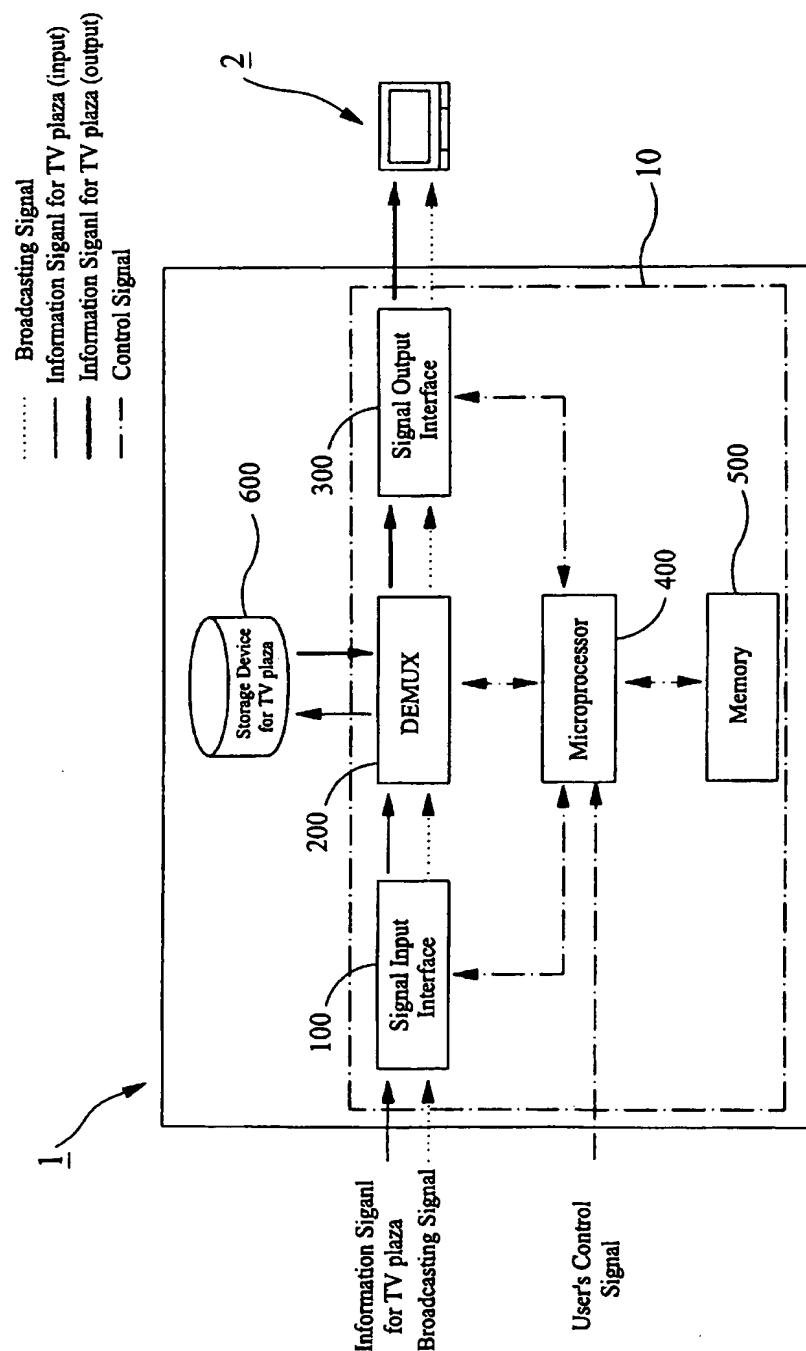

6/6

FIG. 6

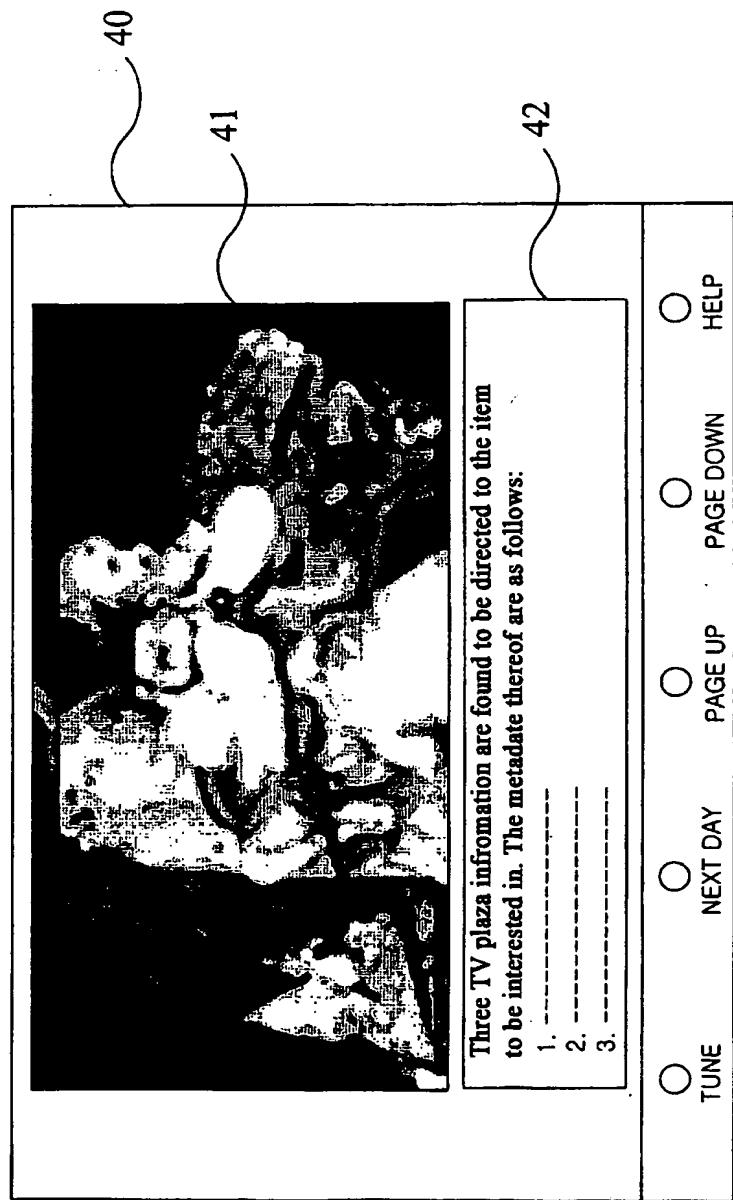

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2004/001014

A. CLASSIFICATION OF SUBJECT MATTER

IPC7 H04N 7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.7 H04N 7/173, H04N 5/44

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean Patents and applications for inventions since 1975
Korean Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKIPASS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2002-32140 A2 (UNITED VIDEO PROPERTIES, INC.) 18 April 2002 - See the whole document	1-3
Y	WO 2002-11433 A2 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 07 February 2002 - See the whole document	1-3
A	WO 2001-19085 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 29 August 2001 - See the whole document	1-3
A	WO 2001-24524 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 28 September 1999 - See the whole document	1-3

Further documents are listed in the continuation of Box C.

See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 20 JULY 2004 (20.07.2004)	Date of mailing of the international search report 21 JULY 2004 (21.07.2004)
Name and mailing address of the ISA/KR  Korean Intellectual Property Office 920 Dunsan-dong, Seo-gu, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140	Authorized officer KWON, KI WON Telephone No. 82-42-481-8123 

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2004/001014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2002-32140 A2		US2002-42921 EP1327357A2	11.04.2002 16.07.2003
WO 2002-11433 A2		JP2004505557T2 EP1308034A2 CN1393099T	19.02.2004 07.05.2003 22.01.2003